## Oil-Water-Separator drukomat plus

more efficiency with preko-streamingfilter higher capacity and longer filter use



## **FUNCTION**

- 1 Condensate feed is possible both under pressure and pressureless
  The condensate is feed from the compressor, or the tank, or the
  dryer if possible with pressure.
  (4 connections 1/2inch)
- 2 Chamber for expansion and de-airation with charcoal filter to exhaust air

This expansion and de-airation chamber assures a calm surface in the separator, even if the condensate is fed under pressure. The activated charcoal filter eleminates the oil from the exhaust air.

- 3 Collecting chamber
- 4 **NEW** preko-streamingfilter
- **5** Settling and Flotation Chamber
- 6 End stage filter
- 7 Water discharge

The remaining oil content of the water discharged is less than 10mg/ltr. if the equipment is correctly dimensioned. This water can be discharged directly into the sewers.


8 Test valve


The test valve permits very simply to take dischargewater samples

- 9 Oil-collect tank with overflow safe-guard
- 10 Test set ... check-glass and oil test paper See Check- and Maintenance Book
- 11 Document department

Operating instructions as well as the Check- and Maintenance Book are at the fingertips at all times.

- 12 optical level control as standard SPDT available as option (retrofitable at any time)
- 13 Heater (optional)

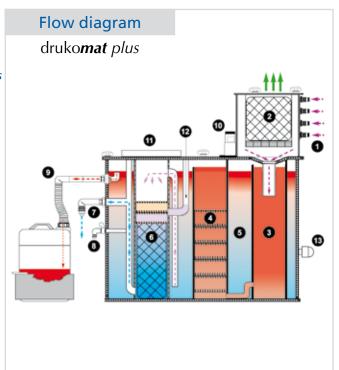

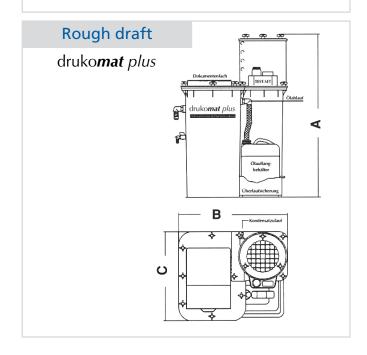

## Technical Data

Туре	Compres- sor capacity in m³/min*	Dimensions (mm)			Weight	Connections			Filtering	
		heigth	width	depth	kg	Condensate Inlet	Water dischar- ge	Oil dischar- ge	Air	Water
druko <b>mat 15</b> plus	15-25	1160	620	520	45	4x 1/2"	1"	1"	1088L	w15+
druko <b>mat 30</b> plus	30-50	1160	850	520	65	4x 1/2"	1"	1"	1088L	w30+
druko <b>mat 31</b> plus	40-60	1160	850	520	70	4x 1/2"	1"	1"	1088L	w31+
druko <b>mat 61</b> plus	60-100	1450	1300	1000	100	4x 1/2"	2"	2"	1088L	w61+

<sup>\*</sup> maximum capacity by using non emulsifying compressor oils.